










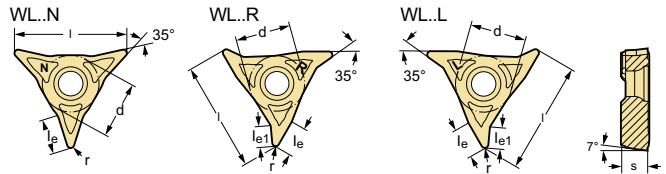

倣い旋削加工システム用チップ
WL
Tiger-tec® Silver




チップ

型番	r mm	l mm	le mm	le1 mm	f mm	ap mm	P			M			K		S	
							HC			HC			HC		HC	
							WPP10S	WPP20S	WMP20S	WMP20S	WSM10S	WSM20S	WSM30S	WKK10S	WKK20S	WSM10S
 WL25-VC0704N-FM4	0,4	25	6,3		0,05-0,20	0,1-2,0				⊕	⊕				⊕	⊕
	WL25-VC0708N-FM4	0,8	25	7,1		0,08-0,25	0,2-2,0				⊕	⊕				⊕
 WL25-VC0704R-FM4	0,4	25	6,2	3,9	0,05-0,20	0,1-2,0				⊕	⊕				⊕	⊕
	WL25-VC0708R-FM4	0,8	25	6,6	4,6	0,08-0,25	0,2-2,0				⊕	⊕				⊕
 WL25-VC0704L-FM4	0,4	25	6,2	3,9	0,05-0,20	0,1-2,0				⊕	⊕				⊕	⊕
	WL25-VC0708L-FM4	0,8	25	6,6	4,6	0,08-0,25	0,2-2,0				⊕	⊕				⊕
 WL25-VC0704N-FP4	0,4	25	6,3		0,05-0,20	0,1-2,0	⊕	⊕								
	WL25-VC0708N-FP4	0,8	25	7,1		0,08-0,25	0,2-2,0	⊕	⊕							
 WL25-VC0704R-FP4	0,4	25	6,2	3,9	0,05-0,20	0,1-2,0	⊕	⊕								
	WL25-VC0708R-FP4	0,8	25	6,6	4,6	0,08-0,25	0,2-2,0	⊕	⊕							
 WL25-VC0704L-FP4	0,4	25	6,2	3,9	0,05-0,20	0,1-2,0	⊕	⊕								
	WL25-VC0708L-FP4	0,8	25	6,6	4,6	0,08-0,25	0,2-2,0	⊕	⊕							
 WL25-VC0704N-MM4	0,4	25	6,3		0,08-0,25	0,4-2,5			⊕	⊕	⊕	⊕			⊕	⊕
	WL25-VC0708N-MM4	0,8	25	7,1		0,12-0,32	0,5-2,5			⊕	⊕	⊕			⊕	⊕
	WL25-VC0712N-MM4	1,2	25	7,4		0,12-0,35	0,5-2,5								⊕	⊕
	WL25-VC0716N-MM4	1,6	25	8,7		0,12-0,40	0,5-2,5								⊕	⊕
 WL25-VC0704R-MM4	0,4	25	6,2	3,9	0,08-0,25	0,4-2,5			⊕	⊕	⊕				⊕	
	WL25-VC0708R-MM4	0,8	25	6,6	4,6	0,12-0,32	0,5-2,5			⊕	⊕	⊕				⊕
 WL25-VC0704L-MM4	0,4	25	6,2	3,9	0,08-0,25	0,4-2,5			⊕	⊕	⊕				⊕	
	WL25-VC0708L-MM4	0,8	25	6,6	4,6	0,12-0,32	0,5-2,5			⊕	⊕	⊕				⊕
 WL25-VC0704N-MP4	0,4	25	6,3		0,08-0,25	0,4-2,5	⊕	⊕								
	WL25-VC0708N-MP4	0,8	25	7,1		0,12-0,32	0,5-2,5	⊕	⊕							
	WL25-VC0712N-MP4	1,2	25	7,4		0,12-0,35	0,5-2,5	⊕	⊕							
	WL25-VC0716N-MP4	1,6	25	8,7		0,12-0,40	0,5-2,5	⊕	⊕							

HC = コーティング超硬

⊕ ⊕ ⊕ / ★ 新製品

倣い旋削加工システム用チップ
WL
Tiger-tec® Silver

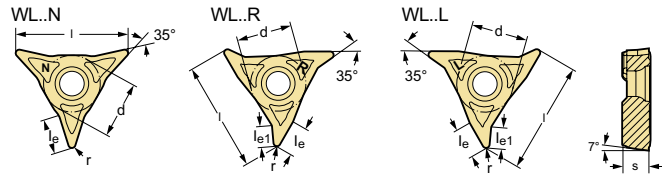


チップ

型番	r mm	l mm	le mm	le1 mm	f mm	ap mm	P			M			K		S	
							HC			HC			HC		HC	
							WPP10S	WPP20S	WMP20S	WMP20S	WSM10S	WSM20S	WSM30S	WKK10S	WKK20S	WSM10S
WL25-VC0704R-MP4	0,4	25	6,2	3,9	0,08-0,25	0,4-2,5	⊕	⊕								
WL25-VC0708R-MP4	0,8	25	6,6	4,6	0,12-0,32	0,5-2,5	⊕	⊕								
WL25-VC0704L-MP4	0,4	25	6,2	3,9	0,08-0,25	0,4-2,5	⊕	⊕								
WL25-VC0708L-MP4	0,8	25	6,6	4,6	0,12-0,32	0,5-2,5	⊕	⊕								

HC = コーティング超硬

倣い旋削加工システム用チップ
WL
Tiger-tec® Silver



チップ

型番	r mm	l mm	le mm	f mm	ap mm	P			M			K		S	
						HC			HC			HC		HC	
						WPP10S	WPP20S	WMP20S	WMP20S	WSM10S	WSM20S	WSM30S	WKK10S	WKK20S	WSM10S
WL25-RC0420N-MU6	2	25	7,2	0,12-0,40	0,5-2,0	⊕			⊕	⊕		⊕	⊕		
WL25-RC0525N-MU6	2,5	25	6,9	0,12-0,45	0,5-2,5	⊕			⊕	⊕		⊕	⊕		

HC = コーティング超硬

WALTER SELECT

加工の状況に適したチップの選択

良好
 中程度
 好ましくない